

HP03

Pendant control station




**Ergonomic pendant control station
with three holes for hoist**

Features

- Bi-directionality is mechanically interlocked;
- IP65 Double insulation (IEC / EN 60529);
- Laser engraved symbols according to EN 60204-1, FEM 9.941;
- Shock proof and heat resistant;
- Available versions: for single or double speed motors;
- Available with UL/CSA requirements;
- Available upon request also in V0 material, UL approved.

Available codes



HP03 Single speed



HP03.D2 Double speed



Compliance and certifications

- 2014/35/UE
- 2011/65/UE RoHS
- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005 EN ISO 13850 2015)
- EN 60204-1 (2006/A1 : 2009)
- EN-ISO 13849-1 (2015)
- EN ISO 13849-2 (2012)
- EN 60529 (1991/A1 : 2000/A2 : 2013)

| Technical data | | |
|--|-----------------------------------|--|
| General characteristics | | |
| Compliant to standards | | IEC / EN60947-5-1 |
| Material | | ABS |
| Material Group | | II |
| Pollution class | | 3 |
| Temperature | operating storage | -25°C ... +70°C -30°C ... +70°C |
| Climate resistance | IEC68 part 2-3 IEC68 part 2-30 | hot dump unsettled hot damp |
| Cable entry | | Spiral cable gland M20 |
| Electrical characteristics - Contact blocks | | |
| Marking | | |
| Rated insulation voltage [Ui] | | 690 V * |
| Rated impulse withstand voltage [Uimp] | | 4 kV * |
| Frequency | | 50/60 Hz * |
| Rated thermal current [Ith] | | 16 A * |
| Rated thermal current in enclosure [Ithe] | | 10 A |
| Rated operational current [Ie] | | |
| AC-15 alternate current | type: PCW.. | 24 V 16 A * 60 V 12 A 110 V 5 A 240 V 5 A * 400 V 4 A 440 V 4 A 500 V 4 A * 690 V 2 A |
| DC-13 direct current | type: PCW.. | 24 V 2 A 48 V 2 A * 60 V 1 A * 110 V 0.4 A 250 V 0.4 A * |
| Minimum constant current | | 1 mA@5Vdc, 1 mA@24Vdc |
| Conditional short circuit withstand current | | 1000 A * |
| Fuses rating gC | | 10 A * - 500 V |
| Contact insulation resistance | | ≤ 25 mΩ |
| Switching mechanism | type: PCW.. | slow break double gap contacts |
| Positive operation | | NC contact blocks - positive opening |
| Operating force | | 4 N |
| Electric durability AC-15 | | 1 A 1.5 millions of cycles 2 A 0.5 millions of cycles 3 A 0.25 millions of cycles |
| Terminal type | type: PCW.. | M3.5 screw terminals |
| Terminal capacity | type: PCW.. | N° 1 or 2 flexible and solid conductor 1 ... 2.5 mm² |
| UL508 characteristics | | |
| Rated insulation voltage [Ui] | | 10 A - 600 V ac / 2.5 A - 125 V dc |
| Rated impulse withstand voltage [Uimp] | | A600-Q600 |

* IMQ approved values



GIOVENZANA
INTERNATIONAL B.V.

HP03

Pendant control station


Available codes



HP03



HP03.D2

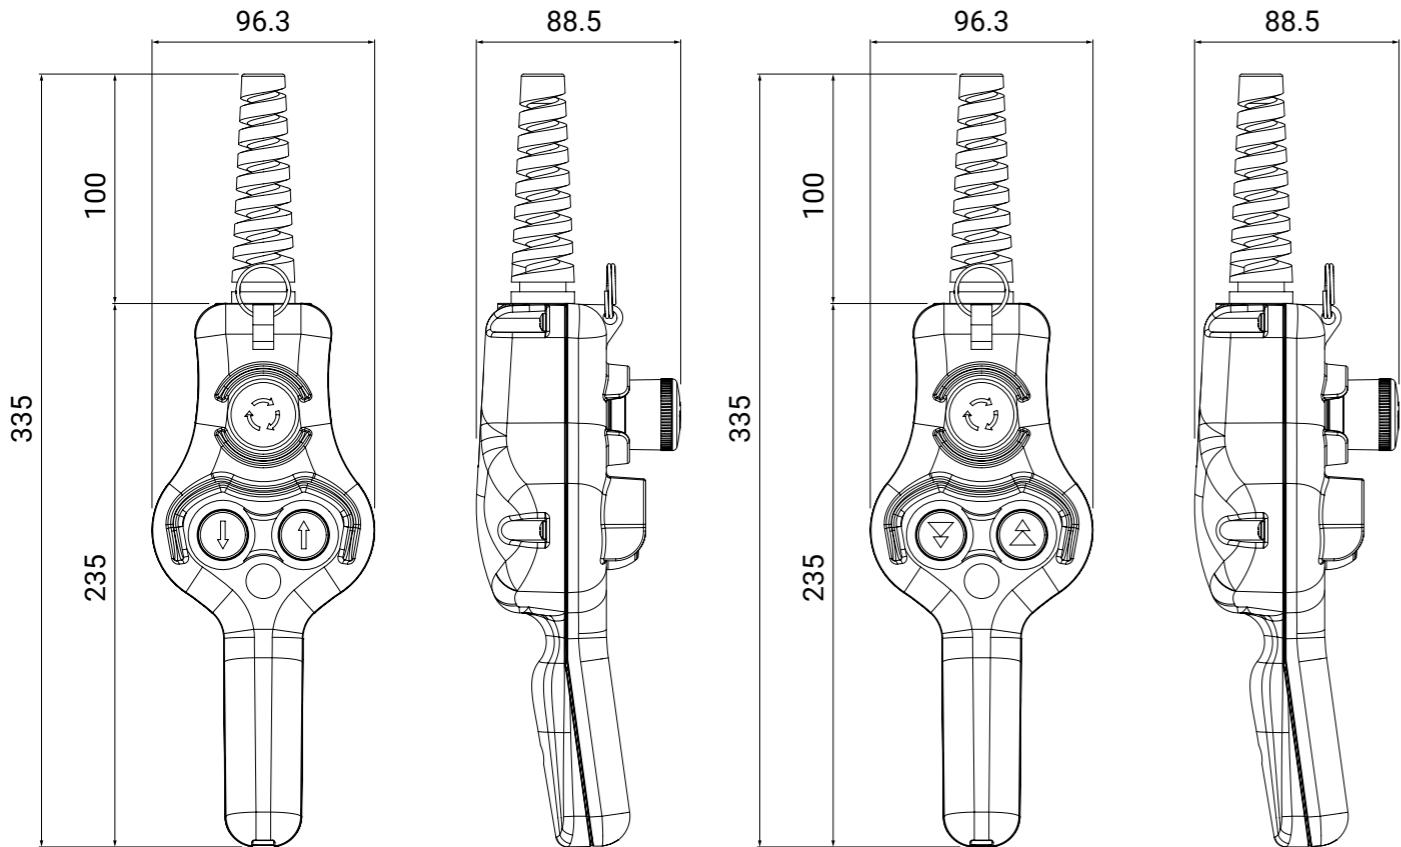

Standard versions

| PRODUCT CODE | FUNCTION | AYOUT | PUSH BUTTON | CONTACT CONFIGURATION |
|----------------|--------------|-------|-------------|-----------------------|
| HP03 | Single speed | | | 1 NC |
| | | | | 1 NO |
| | | | | 1 NO |
| HP03.D2 | Double speed | | | 1 NC |
| | | | | NO + NO |
| | | | | NO + NO |

CONTACT CODE

Single speed



1 NC

PCW01



1 NO

PCW10

Double speed



NO + NO

PCWDS