


**AUXILIARY CONTROLS | PEGASUS SERIES**

**AUXILIARY CONTROLS | PEGASUS SERIES**



**PUSH BUTTON STATION ENCLOSURES | IP65**




TYPE	COVER COLOUR	CODE	WEIGHT grams	MIN. PACK QUANTITY	SIZES
1 HOLES ENCLOSURE	■	PQ01K	134	1	
	■	PQ01KGN			




TYPE	COVER COLOUR	CODE	WEIGHT grams	MIN. PACK QUANTITY	SIZES
2 HOLES ENCLOSURE	■	PQ02K	174	1	
	■	PQ02KGN			



TYPE	COVER COLOUR	CODE	WEIGHT grams	MIN. PACK QUANTITY	SIZES
3 HOLES ENCLOSURE	■	PQ03K	214	1	
	■	PQ03KGN			




TYPE	COVER COLOUR	CODE	WEIGHT grams	MIN. PACK QUANTITY	SIZES
4 HOLES ENCLOSURE	■	PQ04K	256	1	
	■	PQ04KGN			




**PUSH BUTTON STATION ENCLOSURES | IP65**



TYPE	COVER COLOUR	CODE	WEIGHT grams	MIN. PACK QUANTITY	SIZES
5 HOLES ENCLOSURE	■	PQ05K	296	1	
	■	PQ05KGN			

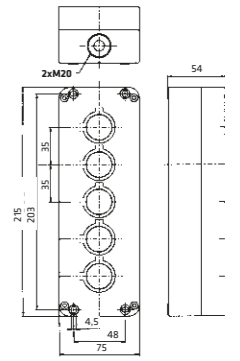

TYPE	COVER COLOUR	CODE	WEIGHT grams	MIN. PACK QUANTITY	SIZES
3 HOLES ENCLOSURE	■	PQ06K	386	1	
	■	PQ06KGN			

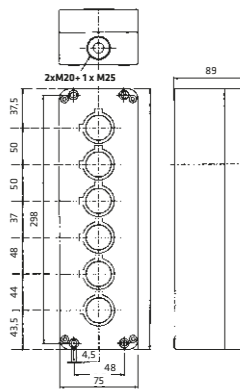

**CHARACTERISTICS**

- ABS self-extinguishing material.
- Self-extinguishing class V0 UL94.
- EN60529 IP65 protection grade.
- Double insulation □ .

- Colors: Black box; Yellow cover; Grey cover.
- Threaded cable entry with membrane conduit knock:
  - 1 hole box nr. 1 M16 + 1 M20 gland, from 2 to 5 holes nr. 2 M20 glands;
  - 6 holes nr. 1 M20 + 1 M25 glands

**ASSEMBLING**

