


**NOTES**  
 DIMENSIONS ARE IN INCHES [MILLIMETERS]

**ORDERING INFORMATION:**

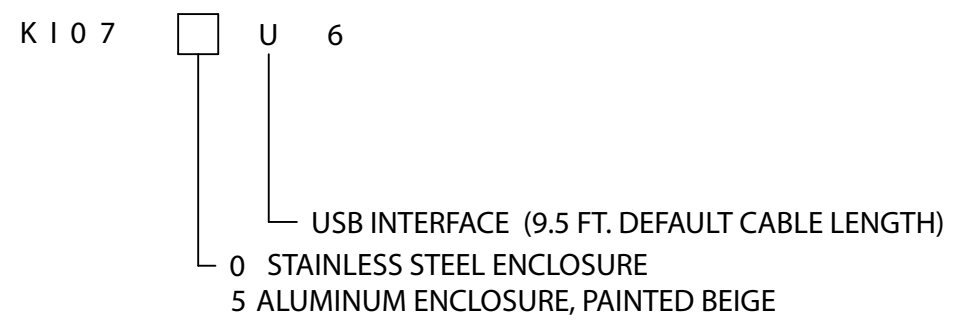

**SPECIFICATION:**

TEMPERATURE: -40°C TO +80°C  
 SEALING: NEMA 4/4X (IP66)  
 SHOCK: 40G (N) 11 msec. per MIL-STD-810  
 WEIGHT: KEYBOARD WITH ALUMINUM ENCLOSURE  
 APPROX. 35 OZ. (1 KILOGRAM)  
 KEYBOARD WITH STAINLESS STEEL ENCLOSURE  
 APPROX. 59 OZ. (1.7 KILOGRAMS)  
 STANDARD: CE, ROHS, REACH, FCC CLASS B  
 PATENTS: 7,499,032, OTHERS PENDING

<b>CTI ELECTRONICS CORPORATION</b>	
<a href="http://WWW.CTIELECTRONICS.COM">WWW.CTIELECTRONICS.COM</a>	
<b>KIO7XU6 SERIES NEMA 4/4X (IP66) MEDICAL/CLEANROOM KEYBOARD WITH ORBITALMOUSE® BUTTON STYLE POINTER</b>	
<b>761869</b>	DATE 11-08-16 DRAWN BY PSB
APPROVED	SHEET 1 OF 1
COPYRIGHT 2015 CTI ELECTRONICS CORP. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE	